

# *Outdoor* *Series*

→ [contact@exd-led.com](mailto:contact@exd-led.com)  
→ [sales@exd-led.com](mailto:sales@exd-led.com)  
→ [supports@exd-led.com](mailto:supports@exd-led.com)



**EXD**  
EXPERTISE IN DISPLAY



# D Series

## LED MODULE SERIES



### Application Showcase




### Product Details



- For Naked-eye 3D
- Copper Power Cables
- High Refresh Rate
- PWM Driver Chips

## D OUTDOOR SERIES

PRODUCT SPECIFICATION	D 2.5	D 3	D 4		D 5	D 6	D 8	D 10
Module Size(mm)	320x160							
Pixel Pitch(mm)	2.5	3.076	4		5	6.667	8	10
Scan Mode(s)	16	13	10	5	8	6	5	2
Resolution(Dots)	128x64	104x52	80x40		64x32	48x24	40x20	32x16
Brightness(CD/m <sup>2</sup> )	4000-4500	4000-4500	4000-4500	5500	4000-4500	4000-4500	4000-4500	5000-5500
Refresh Rate(Hz)	1920/3840	1920/3840	1920/3840		1920/3840	1920/3840	1920/3840	1920/3840
Product Features	Utilizes standard universal 320x160 unit boards, PWM driver chips, with a refresh rate of up to 3840Hz for high-definition display and uniform color display with high grayscale levels. High-quality pure copper power cables, ensuring reliable performance. High-performance outdoor protective silicone with reinforced rib design, capable of withstanding various harsh environments. Customizable 45° beveled base shell, creating a naked-eye 3D effect.							



# DE Series

## LED MODULE SERIES



### Product Details



**Ultra-low Consumption**



**Environmentally Friendly**



**High Refresh Rate**



**High Performance**




### Application Showcase



## DE OUTDOOR SERIES

PRODUCT SPECIFICATION	DE 3	DE 4	DE 5	DE 6	DE 8	DE 10
Module Size(mm)	320x160					
Pixel Pitch(mm)	3.076	4	5	6.667	8	10
Scan Mode(s)	13S	10S	8S	6S	5S	2S
Resolution(Dots)	104x52	80x40	64x32	48x24	40x20	32x16
Brightness(CD/m <sup>2</sup> )	3500-4000	4500-5000	4000-4500	4000-4500	3700-4500	5000-5500
Refresh Rate(Hz)	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840
Product Features	SMD technology, ultra-low power consumption, equipped with a common anode power supply, energy-saving and environmentally friendly by over 40%; lightweight, easier to install and disassemble; low voltage and low current for cooling, high performance, longer lifespan; smoother playback, excellent wide-angle viewing effect.					



# P Series

## LED MODULE SERIES



### Product Details



**Easy to install  
And Disassemble**



**Reliable  
And stable**



**Fast Heat  
Dissipation**



**Ultimate  
Cost-effectiveness**



### Application Showcase



## P OUTDOOR SERIES

PRODUCT SPECIFICATION	P 3	P 4	P 5	P 6	P 8	P 10
Module Size(mm)	192x192	320x160	320x160	192x192	256x128	320x160
Pixel Pitch(mm)	3	4	5	6	8	10
Scan Mode(s)	16	10	8	8	4	4
Resolution(Dots)	64x64	80x40	64x32	32x32	32x16	32x16
Brightness(CD/m <sup>2</sup> )	5000	4500-5000	4000-4500	4000-4500	4000-4500	3500-4000
Refresh Rate(Hz)	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840
Product Features	Lightweight, easy to install and disassemble, high portability; high-protection LEDs with triple-proof coating (waterproof, moisture-proof), ensuring reliability and stability, high-performance potting compound for rapid heat dissipation and anti-aging; 2K/4K high-definition dynamic display with clearer and smoother images, offering excellent value for money.					



# DH Front Maintenance

## LED MODULE SERIES



### Product Details



**Front Maintenance**



**Easy To Maintain And Install**



**High Refresh Rate**



**High Brightness**



### Application Showcase



## DH OUTDOOR FRONT MAINTENANCE

PRODUCT SPECIFICATION	DH 4	DH 5	DH 8	DH 10	DH 4	DH 5	DH 6.67	DH 8	DH 10
Module Size(mm)	320x160				320x320				
Pixel Pitch(mm)	4	5	8	10	4	5	6.67	8	10
Scan Mode(s)	10	8	5	2	10	8	6	5	2
Resolution(Dots)	80x40	64x32	40x20	32x16	80x80	64x64	48x48	40x40	32x32
Brightness(CD/m <sup>2</sup> )	5000	5500	5500	6000	5000	5500	6000	5500	6000
Refresh Rate(Hz)	3840				3840				
Product Features	SMD process, high brightness with low grayscale, peak brightness can reach 800-900nit; high contrast, high refresh rate at 7680Hz; thickened base shell, thick copper PCB, copper bracket, high industry standard.								



# D Series Cabinet

## LED CABINET SERIES



### Application Showcase



### Product Details



For Naked-eye 3D



Copper Power Cables



High Refresh Rate



PWM Driver Chips

## D OUTDOOR SERIES CABINET

PRODUCT SPECIFICATION	D 2.5	D 3	D 4	D 5	D 6	D 8	D 10
Module Size(mm)	320x160						
Cabinet Size (mm)	960x960						
Pixel Pitch(mm)	2.5	3.076	4	5	6.667	8	10
Scan Mode(s)	16	13	10	8	6	5	2
Resolution(Dots)	128x64	104x52	80x40	64x32	48x24	40x20	32x16
Brightness(CD/m <sup>2</sup> )	4000-4500						
Refresh Rate(Hz)	1920/3840						
Product Features	Using standard universal 320*160 module boards, the entire screen is shipped as a unit; the refresh rate can reach 3840Hz for high-definition display, with uniform color in high grayscale display. High-quality pure copper power cables, reliable in quality. Customizable 45° beveled base shell to create a naked-eye 3D shape.						



# FT Floor Tile Screen

## LED CABINET SERIES



### Application Showcase



## FT OUTDOOR SERIES


PRODUCT SPECIFICATION	FT 3.91	FT 4.68	FT 5.2	FT 6.25
Module Size(mm)	500x500			
Cabinet Size(mm)	500x500			
Interaction	Customizable interaction			
Pixel Pitch(mm)	3.91	4.68	5.2	6.25
Resolution(Dots)	126x126	106x106	96x96	80x80
Brightness(CD/m <sup>2</sup> )	4000-4500			
Refresh Rate(Hz)	1920/3840			
Product Features	High-strength faceplate, waterproof, slip-resistant, and impact-resistant, ensuring safety and reliability. High transparency, strong durability, and a high load-bearing capacity up to 2,000 kilograms. Integrated design with high-quality aviation plug wiring, making installation, removal, and maintenance convenient. Built-in chip sensing technology, with high sensitivity, intelligent interaction, and good performance.			

Superior Protection

High Refresh Rate

Durable And Strong Capacity

Intelligent Interaction



# U Series

## LED CABINET SERIES



### Application Showcase



### Product Details



**All-aluminum Enclosure**



**High Brightness**




**Superior Protection**



**Supports Right-angle and Curved tiling**

## U OUTDOOR SERIES

PRODUCT SPECIFICATION	U 6	U 8	U 10
Module Size(mm)	320x480		
Cabinet Size(mm)	960x960		
Pixel Pitch(mm)	6.667	8	10
Scan Mode(s)	6	4	2
Resolution(Dots)	48x72	40x60	32x48
Brightness(CD/m <sup>2</sup> )	5000-10000		
Refresh Rate(Hz)	1920/3840		
Product Features	Adopting an all-aluminum enclosure, which is lightweight. High brightness and high refresh rate display, with uniform color and excellent visual performance. Superior protection and efficient heat dissipation, ensuring safety and reliability. Supports right-angle and curved tiling, allowing for creative shapes to meet various customer needs.		




# TX Series

## COMPLETE MACHINE SERIES



### Application Showcase

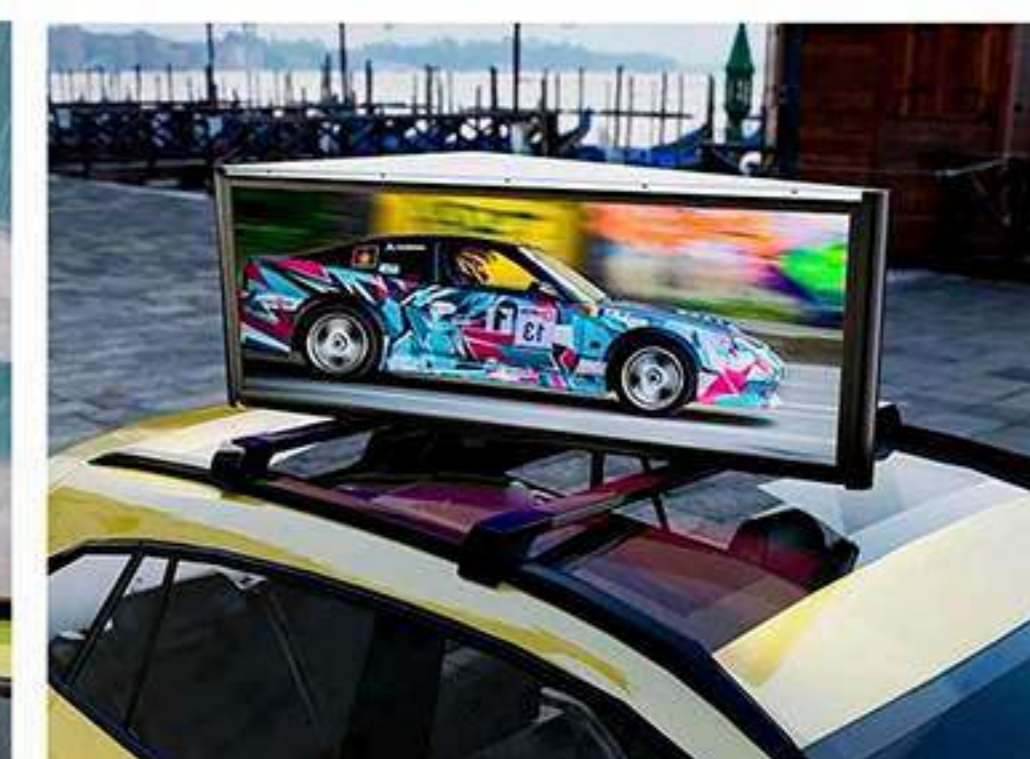

**Durable**



**High Refresh Rate**



**High Contrast**



**Supports Multiple Input**

## TX OUTDOOR SERIES

PRODUCT SPECIFICATION	TX 2.5	TX 3	TX 4	TX 5
Module Size(mm)	300x168.75			
Cabinet Size(mm)	1066*405*61.5			
Pixel Pitch(mm)	2.5	3.076	4	5
Scan Mode(s)	16	13	10	8
Resolution(Dots)	128x64	104x52	80x40	64x32
Brightness(CD/m <sup>2</sup> )	4000-5000			
Refresh Rate(Hz)	3840			
Product Features	Supports all-day playback without affecting the display quality. Easy and convenient installation, supports GPS location-based advertising playback. Supports multiple input methods (USB/RJ45/Wi-Fi/4G), with versatile content options, customizable to meet different customer needs. High contrast and high refresh rate, ensuring clear and delicate images.			



# SY Delivery Box

## COMPLETE MACHINE SERIES



**Strong  
Compatibility**



**Intergrated  
Design**



**Water  
-proof**



**Power  
-efficient**



## Application Showcase



## SY OUTDOOR SERIES

PRODUCT SPECIFICATION	SY 2.6	SY 3	SY 4
Module Size(mm)	336x384	384x384	320x384
Cabinet Size(mm)	500x500		
Pixel Pitch(mm)	2.6	3	4
Scan Mode(s)	20	32	16
Resolution(Dots)	112x128	128x128	80x96
Brightness(CD/m <sup>2</sup> )	4000		
Refresh Rate(Hz)	1920/3840		
Product Features	Integrated design, a mobile advertising platform, lightweight, high strength, and safe and stable. Strong compatibility, easy to install and maintain, and high resistance to deformation. Highly energy-efficient, capable of all-day operation. Waterproof and moisture-resistant, ensuring normal operation even in harsh environments.		